


# 4N-T2408SFP

36 Port 10G Uplink L3 Managed Industrial Ethernet Switch



LOOP PROTECTION

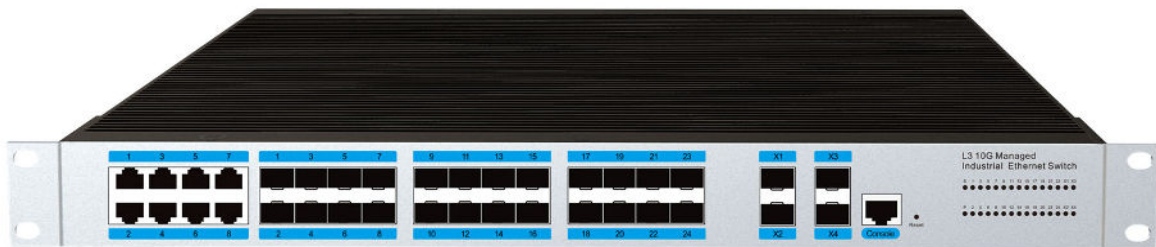

VLAN



6KV LIGHTING PROTECTION

## Product Overview

The 4N-T2408SFP is a 10G uplink Layer 3 managed industrial Ethernet fiber switch independently developed by 4NSYS. It is equipped with 24 × 100/1000Base-X SFP ports, 8 × combo uplink ports (10/100/1000Base-T RJ45), and 4 × 1/10G SFP+ fiber slots.

Each port supports wire-speed forwarding, ensuring high-performance data transmission.

The 4N-T2408SFP has L3 network management function, supports IPV4/ IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, perfect ACL/ QoS policy, and rich VLAN functions, easy to manage and maintain. With industry-leading ring network technology.

## Key Features

- Supports Gigabit Ethernet port and 10G SFP+ port combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- Support ERPS ring network and STP/ RSTP/ M STP to eliminate layer 2 loops and realize link backup.
- Support IGM P V1/ V2/ V3 multicast protocol, IGM P Snooping meets multi-terminal high-definition video surveillance and video conference access requir
- Low power consumption, No fan, aluminum shell.
- The user-friendly panel can show the device status through the LED indicator of PWR,Link.
- Support Web network management, CLI command line (Console, Telnet), SNM P (V1/ V2/ V3) and other diversified management and maintenance.
- Support HTTPS, SSLV3, SSHV1/ V2 and other encryption methods, making management more secure.
- CCC, CE, FCC, RoHS.

Model	4N-T2408SFP	
<b>Interface Characteristics</b>		
Fixed Port	4*1/10G SFP+ ports 24*100/1000Base-X SFP ports 8*Combo uplink (10/100/1000Base-T) 1*Console port	
Ethernet Port	Port 1-24 support 10/100/1000Base-T(X) auto-sensing, full/half duplex MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meters) 100BASE-TX: Cat5 or later UTP(≤100 meters) 1000BASE-T: Cat5e or later UTP(≤100 meters)	
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Optical Fiber Port Expansion	Support Turbo overclocking 2.5G optical module expansion and ring network	
Optical Cable/ Distance	Multi-mode:850nm /0~300M(10G) ,850nm /0~500M (1.25G); Single-mode:1310nm/ 0~40KM,1550nm/ 0~120KM.	
<b>Chip Parameter</b>		
Network Management Type	Layer 3	
Ring network	Supports ERPS ring network function, with a maximum number of rings of 5 and a convergence time of <20ms	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae10GBase-LR/SR, IEEE802.3x	
Packet Forwarding Mode	131Mpps	
Switching Capacity	180Gbps	
Packet Buffer Memory	95MB	
MAC Address	32K	
LED Indicator	PowerIndicatorLight	P: 1 Green
	Fiber Indicator Light	F: 1 Green (Link,SDFED)
	On the RJ45 seat	Yellow:Indicate PoE
		Green: Indicates network working status
Reset Switch	Yes, Press and hold the reset switch for 5s and release it to restore the factory settings	

Power	
Working Voltage	DC36-72V, 4 Pin industrial phoenix terminal, support anti-reverse protection
Power Consumption	Standby<35W, Full load<450W
Power Supply	AC100-240V 50/60Hz industrial power supply
Certification & Warranty	
Lightning Protection	<p>Lightning protection: 6KV 8/20us; Protection level: IP40</p> <p>IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge</p> <p>IEC61000-4-3(RS):10V/m(80~1000MHz)</p> <p>IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV</p> <p>IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V, 1s</p> <p>FCC Part 15/CISPR22(EN55022):Class B</p> <p>IEC61000-6-2(Common Industrial Standard)</p>
Mechanical Properties	<p>IEC60068-2-6 (anti vibration)</p> <p>IEC60068-2-27 (anti shock)</p> <p>IEC60068-2-32 (free fall)</p>
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Physical Parameter	
Operation TEMP /Humidity	-40~+80°C, 5%~90% RH Non condensing
Storage TEMP /Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440mm* 300mm*44mm
Installation	Desktop, 19 inch 1U cabinet installation

Network Management Features	
L3 Function	<p>Support L3 network management function</p> <p>Supports IPV4 dynamic routing RIPv1/v2、OSPFv2</p> <p>Supports IPV4/IPV6 static routing/default routing, each supporting a maximum of 128 entries</p> <p>Supports three-layer routing forwarding, supports communication between different network segments and VLANs</p>
Port configuration	<p>Auto-negotiation</p> <p>Flow Control</p> <p>Port Mirror: TX/RX/BOTH; Many-to-1 monitor</p> <p>Traffic statistics</p>
Link Aggregation	<p>Static link aggregation</p> <p>LACP</p> <p>Algorithm based on Source/Destination MAC Algorithm based on Source/Destination IP</p>
MAC Table	<p>Aging Time</p> <p>Static MAC address</p> <p>Dynamic MAC address management</p>
VLAN	<p>4094 Active VLANs</p> <p>4094 VID</p> <p>802.1Q Tag VLAN</p> <p>Port VLAN</p> <p>Protocol VLAN</p> <p>MAC VLAN</p> <p>Voice VLAN</p> <p>802.1ad Q-in-Q tunneling Private VLAN (Protected port) GARP/GVRP</p>
ACL	<p>256ACLs</p> <p>L2, L3 e L4</p> <p>Time-based ACL</p>
Spanning tree	<p>802.1D Spanning Tree Protocol (STP)</p> <p>802.1w Rapid Spanning Tree Protocol (RSTP) 802.1s Multiple Spanning Tree Protocol (MSTP) Loop Guard</p> <p>Root Guard</p> <p>TC-BPDU Guard</p> <p>BPDU Guard BPDU Filter</p>
Ring Protection	<p>&lt;20ms G.8032 ERPS Ring</p>
Multicast	<p>256 groups</p> <p>IGMP v1/v2/v3 Snooping, Fast Leave MLD Snooping</p> <p>Multicast VLAN</p>
QOS	<p>port-based</p> <p>CoS 802.1p-based CoS</p> <p>DSCP-based</p> <p>Scheduling algorithms SP, WRR, SP+WRR</p> <p>Storm Control (Broadcast, Multicast, Unknown Unicast) Bandwidth control per port</p>

DHCP	<p>SNMP v1/v2c/v3 with Full Private MIBs RMON 4 groups</p> <p>WEB (HTTP/HTTPS)</p> <p>CLI (Telnet, Console, SSHv1/v2) Firmware upgrade via console/web/TFTP Configuration</p> <p>Backup/Reload</p> <p>Dual Firmware</p> <p>LLDP</p>
Security Features	<p>Port Security MAC address filter</p> <p>ARP Association (Manual, ARP scanning, DHCP snooping) ARP Protection</p> <p>DoS (Denial of Service)</p> <p>Classification of packages based on: End.MAC, IP End, TCP / UDP Ports, Protocol Type;</p> <p>802.1x Authentication (port-based e MAC-based)</p> <p>TACACS/TACACS+ Authentication</p> <p>RADIUS Authentication</p> <p>DHCP Filter</p> <p>Guest VLAN</p> <p>SSLv2/SSLv3/TLSv1</p> <p>SSHv1/SSHv2</p> <p>Restriction of WEB access based on: IP Address, And. MAC and Port; Port Isolation Loopback detection</p>
Other Features	<p>DNS Client DHCP</p> <p>Relay DHCP Client</p> <p>DHCP Snooping</p> <p>DHCP Option 82</p> <p>SNTP Client</p> <p>UDLD</p>
Maintenance	<p>Cable Diagnostics</p> <p>Ping</p> <p>SFP DDM(Digital Diagnostics Monitoring) Thermal protection</p> <p>System log (Local and Remote)</p> <p>Memory and CPU Monitoring</p>



**4NSYS Co., Ltd.**

3F Hana Bldg, 118-2 Oryu-Dong, Guro-Gu, Seoul, Korea, 152100, Korea (South)

Tel : +82-2-2685-7300 Email : sales@4nsystech.com

[www.4nsystech.com](http://www.4nsystech.com)

South Korea



© Copyright 1991 4NSYS Co.,Lt<sup>®</sup>  
 4NSYS and the 4NSYS logo are trademarks of 4NSYS Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.